SPAN & SHELTER

PRODUCT CATALOG

SPANANDSHELTER.COM



PRODUCT CATALOG

BAND SHELLS

Standard band shells, features & options

DESIGNED, PRICED & INSTALLED BY


SPAN & SHELTER

SHELTERS · BUILDINGS · BRIDGES


projects@spanandshelter.com

De Soto, Kansas

BAND

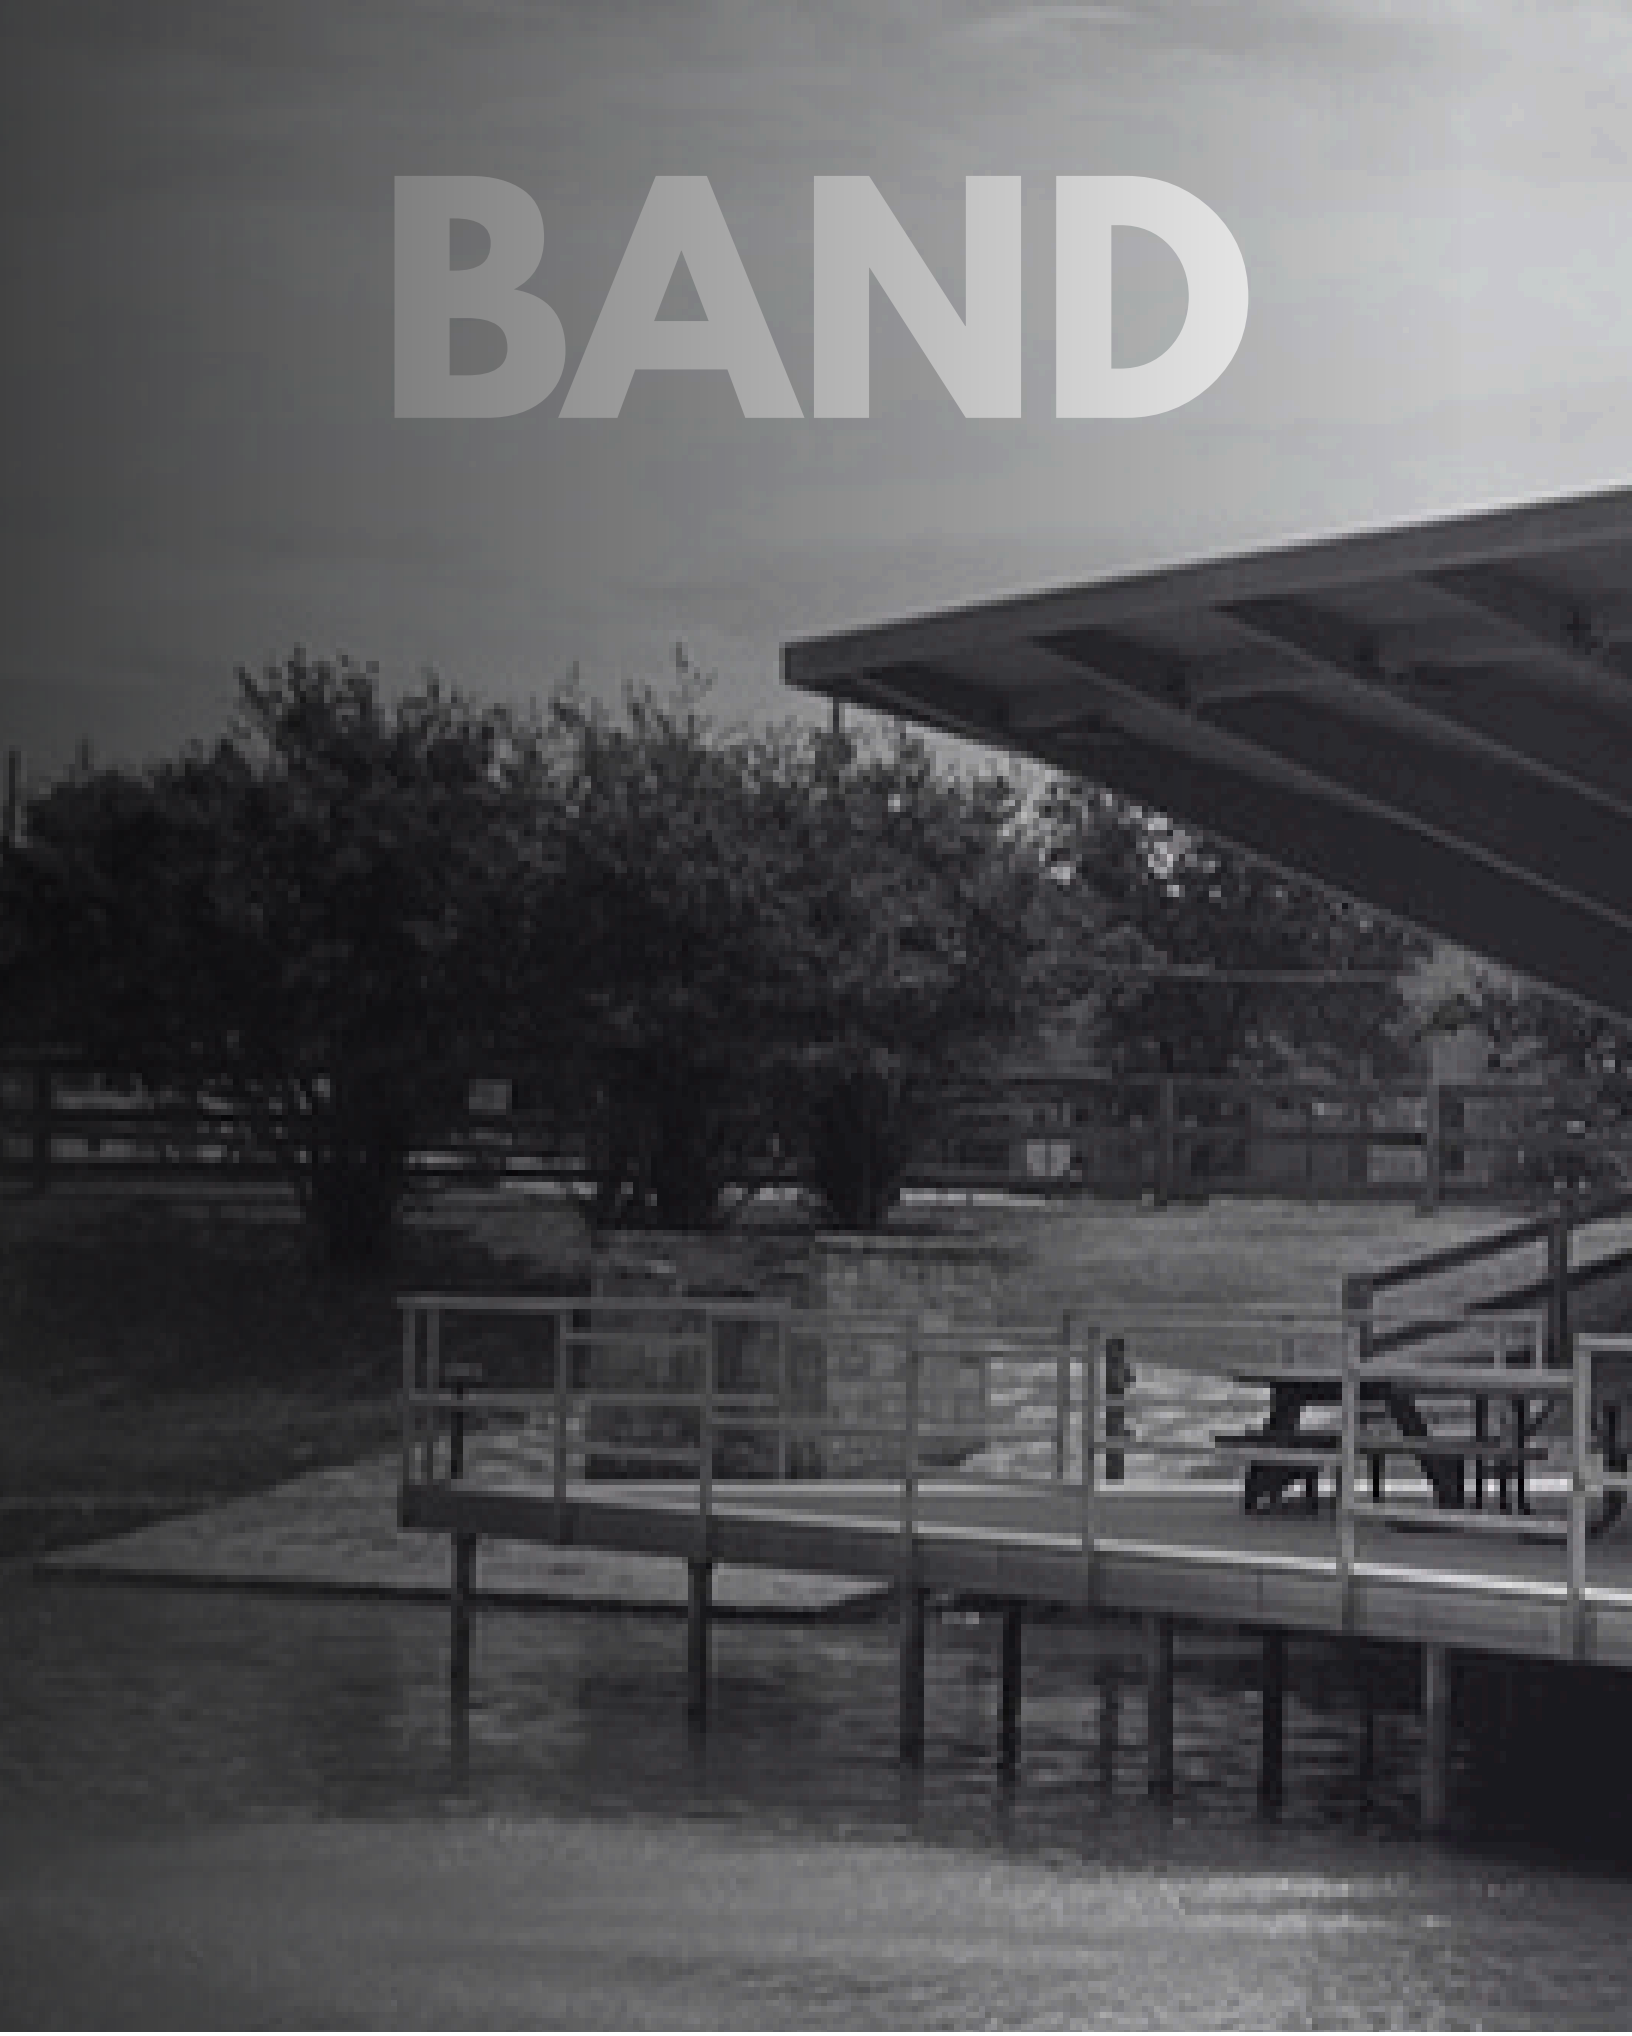

SHELLS

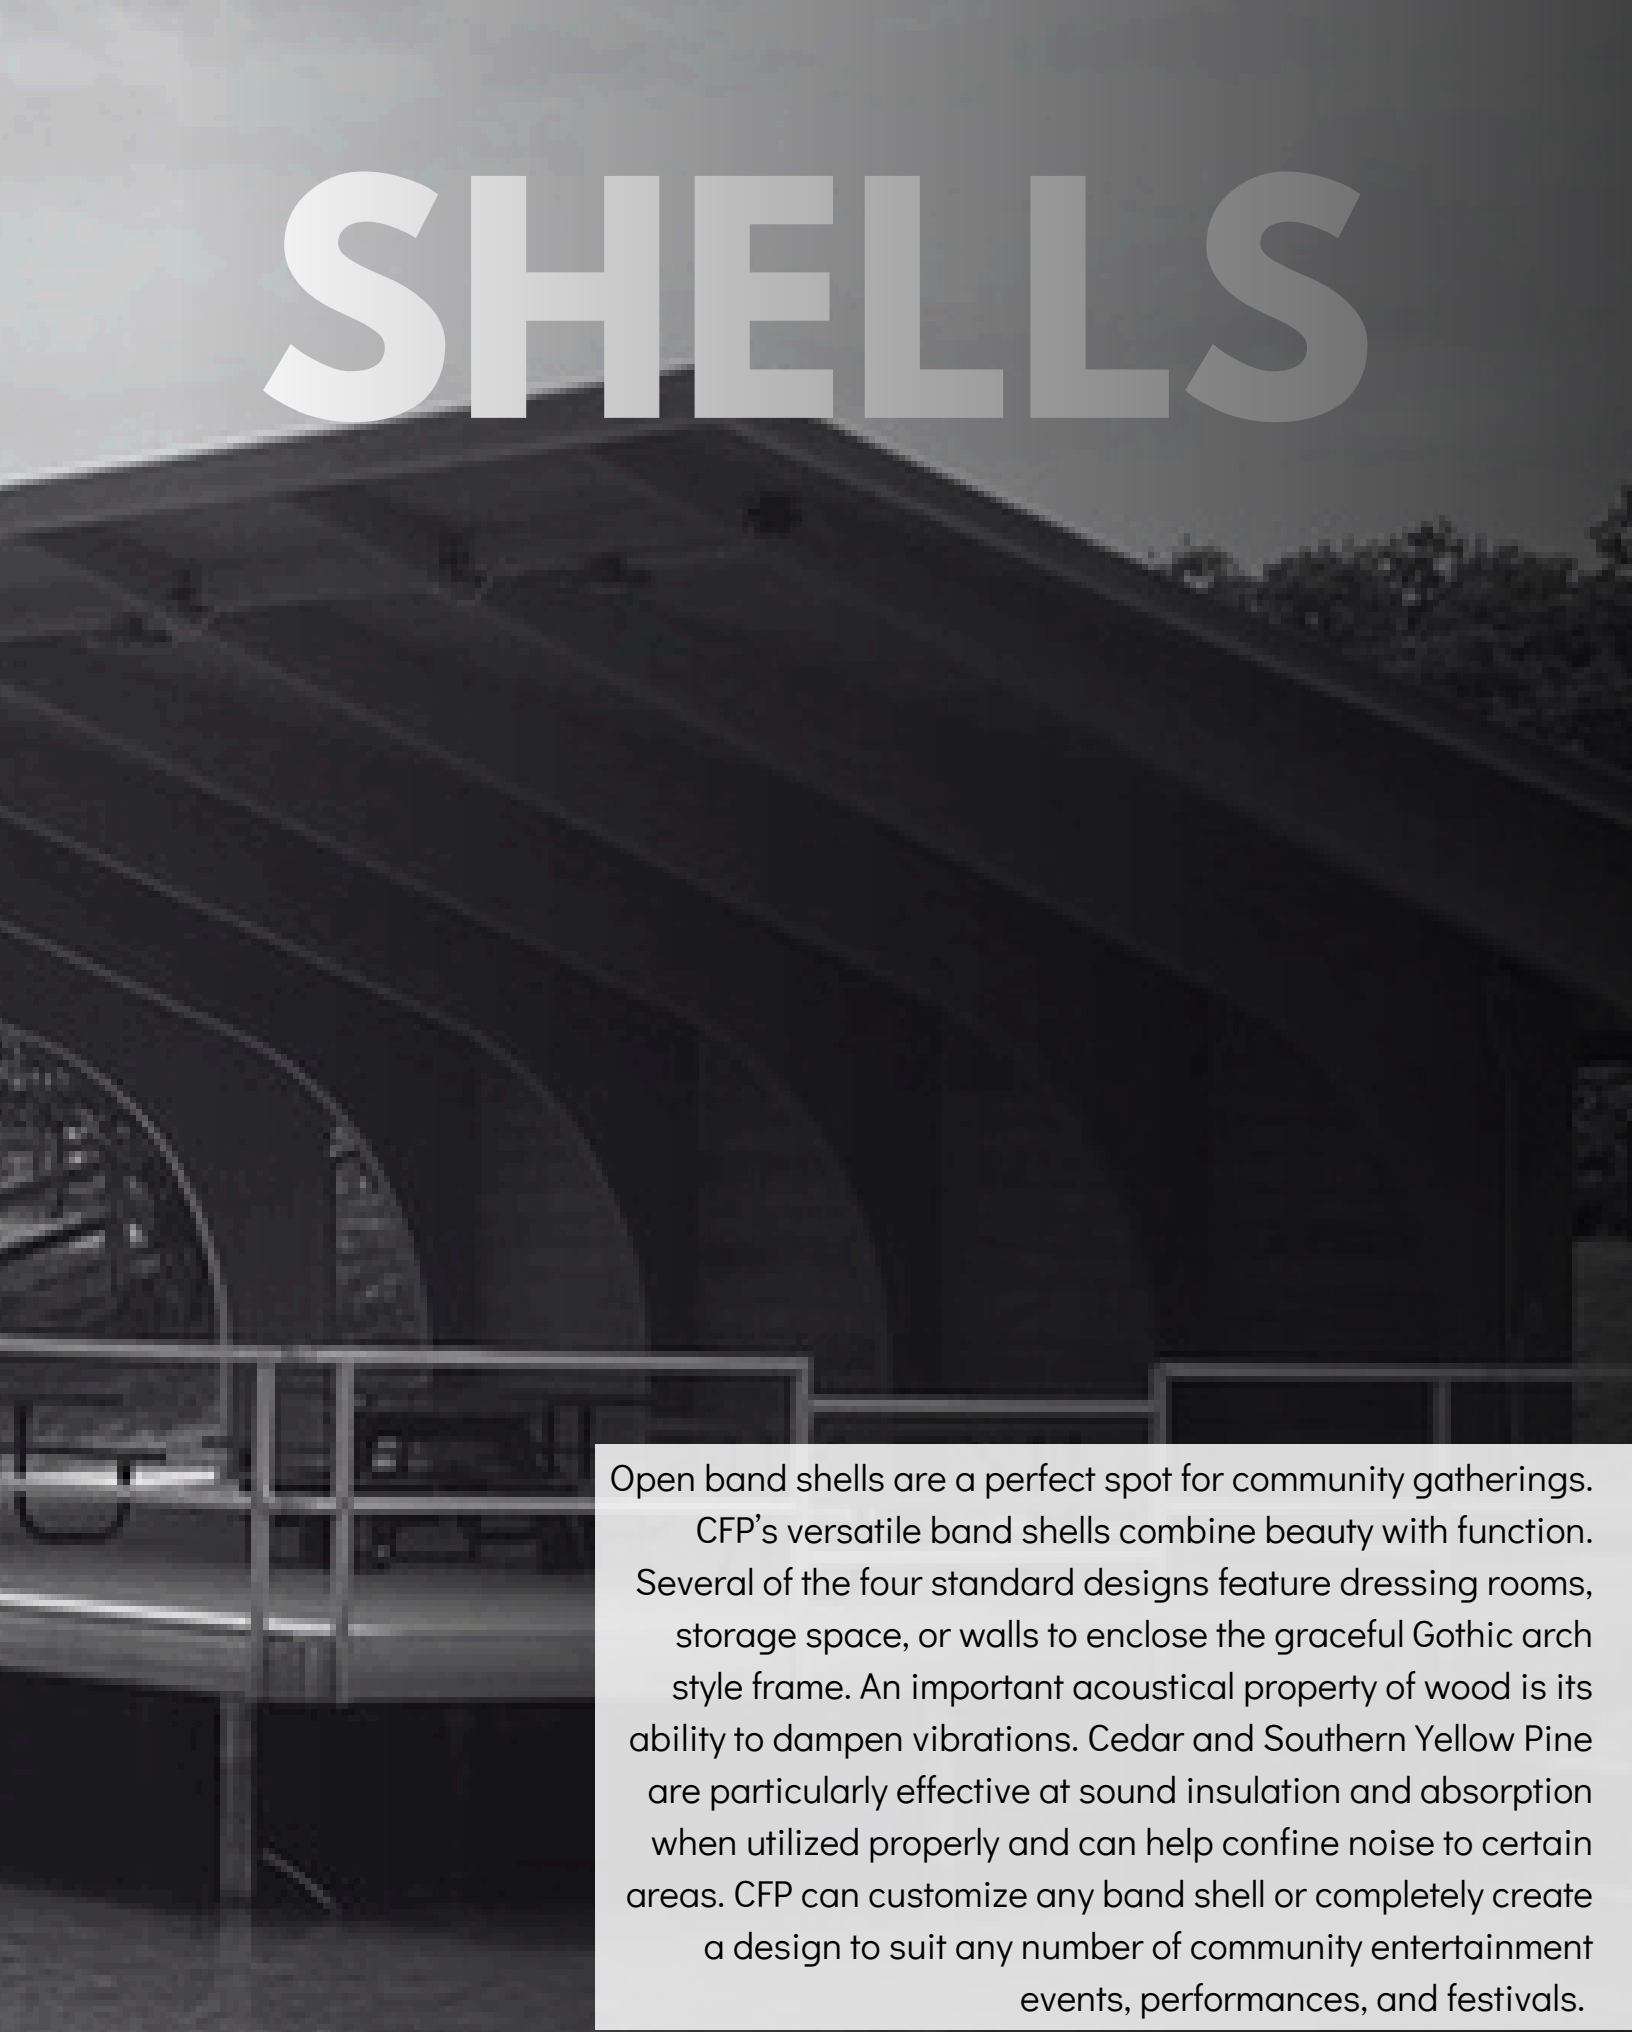

Open band shells are a perfect spot for community gatherings. CFP's versatile band shells combine beauty with function. Several of the four standard designs feature dressing rooms, storage space, or walls to enclose the graceful Gothic arch style frame. An important acoustical property of wood is its ability to dampen vibrations. Cedar and Southern Yellow Pine are particularly effective at sound insulation and absorption when utilized properly and can help confine noise to certain areas. CFP can customize any band shell or completely create a design to suit any number of community entertainment events, performances, and festivals.



Spotlight

Casperson- Lakeville, MN

Features

The Casperson Park Outdoor Performance Stage is a 62' x 25' Custom Band Shell with a 16' x 32' rear storage area. The structure is accented with a Hartford Green metal roof.

About the Building

The Band Shell, located in Lakeville, MN was built in 2023 and sits on a hill overlooking beautiful Lake Marion.







Standard Features

Pre-Engineered Designs

- Each band shell is pre-engineered to meet or exceed local building requirements
- Stamped and sealed drawings and calculations completed by a structural engineer to meet a project's state and local building codes

Structure Frame

- Glulam Southern Yellow Pine (SYP)
- Each shelter is designed to meet the local snow and wind loads
- All metal connectors have a factory applied powder coat finish in Railing Black

Columns

- Gothic arch style glue-laminated SYP columns are either direct embedded in concrete footings or attached at the surface utilizing metal base shoes

Walls

- Band Shell 1, 3, and 4 have nominal 4" x 8" double T & G cedar walls and Salem Square corners
- Band Shell 2 walls are 2" x 6" select grade pressure treated SYP

Roofing

- #1 grade kiln dried 2" x 6" SYP roof decking
- 2" x 8" Cedar fascia
- 30-year architectural grade shingle package


Optional Features

Color options and selections shown on page 74








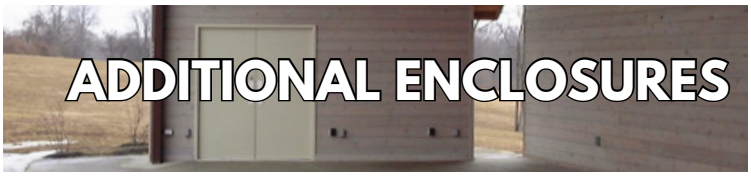







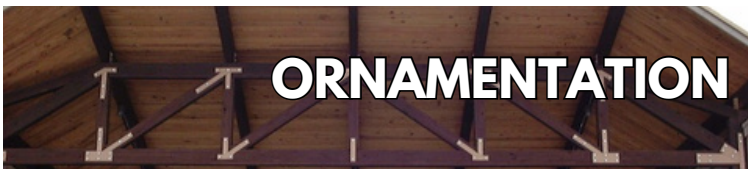







BAND 1

69' x 27'



BAND 2

34' x 45'



BAND 3

69' x 27'



BAND 4

24' x 45'

Wood Color Options & Selections

Colors shown are only representative

29 Gauge Metal Roofing Color Options



Shingle Color Options



Stain Color Options

