SPAN & SHELTER

PRODUCT CATALOG

SPANANDSHELTER.COM



WOOD SHELTER

THE MEADOW

Four-sided timber pavilion

MANUFACTURER MODEL: WOOD HIP

DESIGNED, PRICED & INSTALLED BY

SPAN & SHELTER

SHELTERS · BUILDINGS · BRIDGES

projects@spanandshelter.com

De Soto, Kansas



WOOD HIP

Glulam Port Orford Cedar columns, glulam SYP beams and purlins, #1 grade kiln dried 2" x 6" SYP roof decking, 2" x 8" Alaskan Yellow Cedar fascia, 30-year architectural grade shingle package, 4:12 roof pitch



Standard Sizes

WH 12 x 12	WH 20 x 20	WH 28 x 28	WH 36 x 36
WH 16 x 16	WH 24 x 24	WH 32 x 32	WH 40 x 40

Options

Cedar Roof Decking – Cedar Shingles – Metal Roofing – Cupola – Steel Columns – Ornamentation – Roof Pitches – Factory Finish – Customization

Standard Features

Pre-Engineered Designs

- Each shelter is pre-engineered to meet or exceed local building requirements
- Stamped and sealed drawings and calculations completed by a structural engineer to meet a project's state and local building codes

Structure Frame

- Glue laminated Southern Yellow Pine (SYP)
- Each shelter is designed to meet the local snow and wind loads
- All metal connectors have a factory applied powder coat finish in Railing Black

Columns

- Port Orford Cedar columns – with powder coated steel base shoes
- Port Orford Cedar provides superior resistance against rot and decay

Roofing

- #1 grade kiln dried 2" x 6" SYP roof decking
- 2" x 8" Alaskan Yellow Cedar fascia
- 30-year architectural grade shingle package

Optional Features

Color options and selections shown on page 74














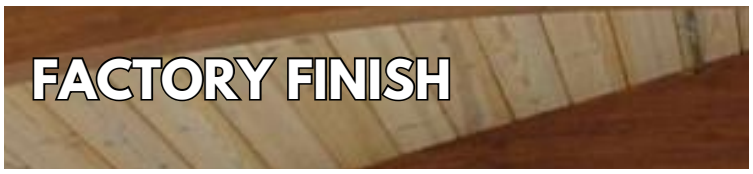







Wood Color Options & Selections

Colors shown are only representative

29 Gauge Metal Roofing Color Options



Shingle Color Options



Stain Color Options

